



KABLOVSKE UVODNICE

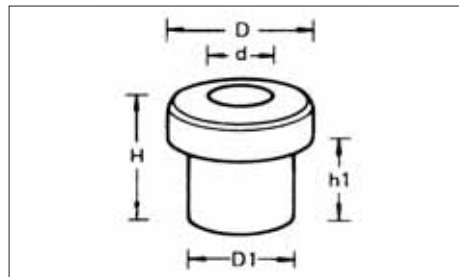

Jednostrane						
d mm	D1 mm	D mm	H mm	h1 mm	Art.-Nr.	Pak/kom
6	10	14	12	8	0561 663 6	25/100
8	11	16	13	9	0561 663 8	25/100
10	14	18	15	10	0561 664 0	25/100
12	17	20	17	11	0561 664 2	25/100


Može se uskladištiti u sistem ORSY®

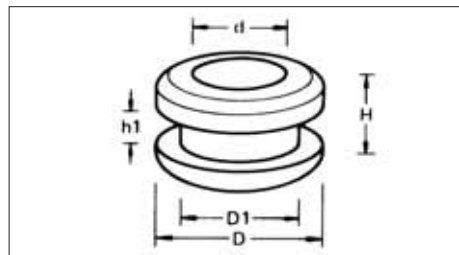

Dvostrane						
d mm	D1 mm	D mm	H mm	h1 mm	Art.-Nr.	Pak/kom
6	9	11	6	1	0561 663 2	25/100
4,5	6,5	9,5	6	1,2	0561 663 4	25/100
6	9,8	12,7	8	2	0561 664 6	25/100
9	11	16	6,5	1	0561 664 8	25/100
10	12	18	8	1	0561 665 0	25/100
12	20	23,8	10	4	0561 665 2	25/100
13	21	26	9	2	0561 666 2	25/100
16	24	30	11	3	0561 666 3	25/100
21	31	38	11	1,5	0561 666 5	25/100
25	30	36	11	3,5	0561 666 6	25/100

Može se uskladištiti u sistem ORSY®

KABLOVSKE KAROSERIJSKE STEGE

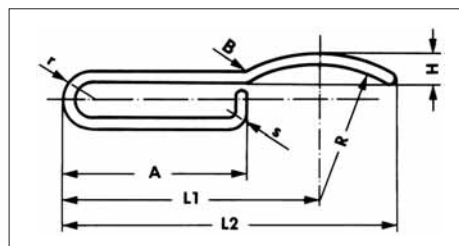

Dimenzije mm	L1 mm	L2 mm	A mm	B mm	H mm	E mm	r mm	s mm	Art.-Nr.	Pak/kom
28x12x0,6	22	28	15	12	3	6	0,6	2,8	0505 28	100/300
43x12x0,8	31	43	24	12	4	9	2,5	0,8	0505 40	100/300

Može se uskladištiti u sistem ORSY®

- Otporne na koroziju, vremenske uticaje (UV-zračenje, ozon), kiseline i slabe baze, kratkotrajno prskanje uljem i otapalima (između ostalog gorivima)
- Temperaturno područje: - 40 °C do + 120 °C
- Bez silikona
- ROHS-usklađeno
- Tolerancije prema ISO 3302-1 M2
- Materijal: EPDM-kaučuk
- Boja: crna

Sortiment

- Materijal: EPDM-kaučuk
- Tolerancije prema ISO 3302-1 M2



Art.-Nr. 0964 561 6
Pak./kom. 1

Kablovske uvodnice 1

dvostrane

Sadržaj: 8 veličina od 4x9 - 21x38 mm
= 555 dijelova



Art.-Nr. 0964 561 61
Pak./kom. 1

Kablovske uvodnice 2

jedno- i dvostrane

Sadržaj: 12 veličina od 4x9 - 21x38 mm
= 200 dijelova

- Pocičane
- Za pričvršćenje kablova i vodova na šasiju vozila, posebno kamiona i prikolica
- Koroziono otporne