

1/2" nasadni ključevi, metrički, kratki


Norma: DIN 3129, DIN 3121 / ISO 1174.

Izvedba: kovani, brunirani.

Prihvat: 1/2", otvor za osiguravajuću čiviju i žlijeb za O-prsten.

Izlaz: šestougaoni, metrički.

Geometrija: kratki.

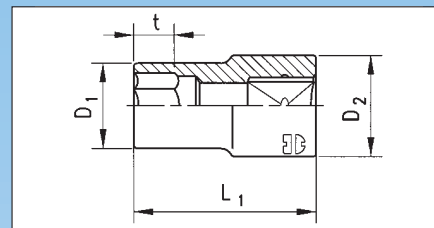

mm	L 1 mm	D 1 mm	D 2 mm	t mm	Art.-Nr.	
3/8"	38	16	22	12	0714 13 02	1
10	38	17,5	25	12	0714 13 03	
12	38	20	25	12	0714 13 04	
13	38	21	25	12	0714 13 05	
14	38	22,5	25	12	0714 13 06	
15	38	23,7	30	12	0714 13 07	
16	38	25	30	12	0714 13 071	
17	38	26	30	13	0714 13 08	
18	38	27,5	30	13	0714 13 081	
19	38	28,7	30	13	0714 13 09	
21	38	30	30	13	0714 13 091	
22	38	32	30	13	0714 13 10	
24	45	35	30	20	0714 13 11	
27	50	38,7	30	22	0714 13 12	
30	50	42	30	22	0714 13 30	
32	50	44	30	28	0714 13 32	
34	50	46	30	28	0714 13 34	
36	50	49	30	28	0714 13 36	

1/2" nasadni ključevi, metrički, dugi


Norma: DIN 3121 / ISO 1174.

Izvedba: kovani, brunirani.

Prihvat: 1/2", otvor za osiguravajuću čiviju i žlijeb za O-prsten.

Izlaz: šestougaoni, metrički, modifikovani Powerdriv.

Geometrija: dugi.

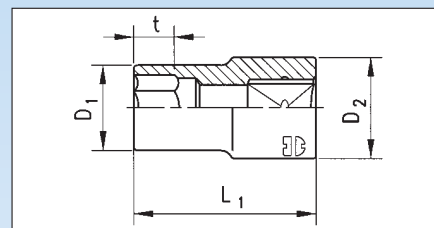

mm	L 1 mm	D 1 mm	D 2 mm	t mm	Art.-Nr.	
13	78	21	25	14	0714 13 13	1
16	78	25	30	17	0714 13 131	
17	78	26	30	17	0714 13 14	
18	78	27,5	30	17	0714 13 142	
19	78	28,7	30	19	0714 13 15	
21	78	30	30	24	0714 13 151	
22	78	32	30	24	0714 13 16	
24	78	35	30	24	0714 13 17	
27	78	38,7	30	24	0714 13 18	